



## 2/2-way-Angle-Seat Control Valve, Threaded port and weld end, Port size DN 15-50

- Excellent control characteristic and high flow rates
- Durable, robust and cost effective
- Ultra compact design, low weight
- Quality certifications available

Type 2702 can be combined with...



**Type 8692/8693**  
Positioner / Prozess controller TopControl



**Type 8694**  
Positioner TopControl Basic



**Type 8630**  
Positioner TopControl



**Type 8635**  
Positioner Side-Control



**Type 8792/93**  
SideControl Remote-Versions



**Type 8030**  
Flow sensor

The 2702 Control Valve consists of an 316L angle seat body with a rugged pneumatic piston actuator. The parabolic trim results in a flow characteristic approximately 35% larger than conventional control valves. It is available in either stainless steel on stainless steel or with a durable PTFE seal for tight shut-off.

Type 2702 can be actuated by the Continuous TopControl Type 8692/8693/8694/8630 or SideControl Type 8635 and 8792/93. TopControl/SideControl thus forms a mechanical and functional unit with the pneumatic actuator as a complete control valve system.

This system has been engineered for reliable accurate control in applications where high flow rate is an advantage.

### Proven Applications

- Food and beverage CIP/SIP and auxiliary processes with steam, chilled water and glycol
- Textile machinery (steam, water, air) and dyeing
- Heat exchangers and autoclaves
- Sterilizers and washers
- Distillation apparatus
- Packaging and filling machinery

### Technical data

<b>Material</b>	
Body	Cast stainless steel (conform to 1.4409)
Actuator	PA polyamide (PPS on request)
<b>Seat sealing</b>	St.st./St.st. (stainless steel/stainless steel), PTFE/St.st. (PTFE/stainless steel)
<b>Seat leakage according to IEC 534-4/EN 1349</b>	Shut-off class IV for St.st./St.st. Shut-off class VI for PTFE/St.st.
<b>Process media</b> (vacuum version on request)	For neutral gases, water, alcohols, oils, fuels, hydraulic liquids, salt solutions, lyes, organic solvents, steam (10 bar(abs)/+180°C)
<b>Viscosity</b>	max. 600 mm <sup>2</sup> /s
<b>Spindle packing</b>	PTFE-Seal (with silicone grease) with spring compensation
<b>Nominal pressure</b>	PN 25 (body)
<b>Temperatures</b>	
Medium	-10°C to +180°C <sup>1)</sup> (max. +130°C for PTFE/St.st. sealing recommended)
Ambient	-10°C to +60°C <sup>1)</sup>
<b>Control medium</b>	Instrument air
<b>Control pressure</b>	5.5 to 7 bar
<b>Pilot air ports:</b>	G 1/4 stainless steel (St. st.)
<b>Flow direction</b>	Below seat
<b>Flow characteristics</b>	Modified equal percentage
<b>Control ratio (Kvs/KvO)</b>	More than 50:1

1) high temperature on request

continued on next page

### Content



#### Valve specifications

##### Type 2702

Technical data & ordering info. p. 1-7



#### System Continuous Classic

##### Type 8802-YC

Ordering info. & technical data

#### Request for quotation


##### Type 8802-YC

p. 13

## Technical data, continued

Technical data		
Port connections	Threaded	
	G	<ul style="list-style-type: none"> <li>▪ DIN ISO 228</li> <li>▪ ANSI/ASME B1.20.1</li> <li>▪ ISO 7</li> </ul>
Weld end	NPT	▪ EN ISO 1127/ISO 4200
	Rc	▪ DIN 11850 series 2
	ISO	▪ SMS 3008 (on request)
	DIN	▪ BS 4825 part 1 (on request)
	SMS	▪ ASME BPE (on request)
Installation	OD-Tube	
As required, preferably with actuator in upright position		

## Flow characteristic

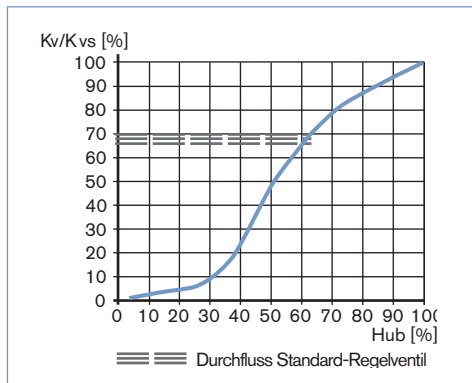

## Remarks on the flow characteristic








Modified equipercentile flow characteristic, engineered for a quick response during peak flow demand (an advantage for many processes like heating/cooling with heat exchangers) and fine control at lower flow.

Kvs values [m<sup>3</sup>/h]

Port size [mm]	Actuator size [mm]	Stroke [%]										
		5	10	20	30	40	50	60	70	80	90	100
15	80	0,23	0,24	0,26	0,35	0,7	1,85	2,9	3,5	4	4,3	4,5
20	80	0,30	0,33	0,42	0,7	2,85	5,3	6,6	7,5	8,2	8,6	9
25	80	0,39	0,41	0,60	1,25	4,5	8,5	10,5	12,2	13,5	14,2	15
32	80	0,55	0,65	0,95	1,5	4	9,3	13,8	16,5	18,8	21	23
40	100	0,65	0,85	1,5	5	14	20	25	27	30	33	35
50	100	1	1,3	2	5	16	27	34	41	45	49	53

## Ordering chart for Angle seat valve (without positioner)

Valves with threaded port connection, flow below seat

	Control function	Port size		Actuator size Ø [mm]	Kvs values [m³/h]	Operating pressure ≤ +180°C [bar]	Item no. seal system* St.st./St.st.	Item no. seal system* PTFE/St.st.
		[mm]	[Zoll]					
<b>Acc. to G, DIN ISO 228, flow below seat</b>								
 2/2-way-valve, normally closed by spring action (NC)	A	15	1/2"	80	4,5	16	165 523	165 486
		20	3/4"	80	9	16	165 526	165 489
		25	1"	80	15	16	165 531	165 513
		32	1 1/4"	80	23	15	165 537	165 515
		40	1 1/2"	100	35	12,5	165 540	165 518
		50	2"	100	53	7,2	165 543	165 520
 2/2-way-valve, normally open by spring action; (NO)	B	15	1/2"	80	4,5	16	165 580	165 546
		20	3/4"	80	9	16	165 584	165 549
		25	1"	80	15	16	165 566	165 553
		32	1 1/4"	80	23	15	165 569	165 557
		40	1 1/2"	100	35	12,5	165 592	165 572
		50	2"	100	53	7,2	165 598	165 575
<b>Acc. to NPT, ANSI/ASME B1.20.1, flow below seat</b>								
 2/2-way-valve, normally closed by spring action (NC)	A	15	1/2"	80	4,5	16	463 837	463 843
		20	3/4"	80	9	16	463 838	463 844
		25	1"	80	15	16	463 839	463 845
		32	1 1/4"	80	23	15	463 840	463 846
		40	1 1/2"	100	35	12,5	463 841	463 847
		50	2"	100	53	7,2	462 106	462 100
 2/2-way-valve, normally open by spring action; (NO)	B	15	1/2"	80	4,5	16	463 849	463 855
		20	3/4"	80	9	16	463 850	463 856
		25	1"	80	15	16	463 851	463 857
		32	1 1/4"	80	23	15	463 852	463 858
		40	1 1/2"	100	35	12,5	463 853	463 859
		50	2"	100	53	7,2	462 123	462 114
<b>Acc. to Rc, ISO 7, flow below seat</b>								
 2/2-way-valve, normally closed by spring action (NC)	A	15	1/2"	80	4,5	16	507 413	507 419
		20	3/4"	80	9	16	507 414	507 420
		25	1"	80	15	16	507 415	507 421
		32	1 1/4"	80	23	15	507 416	507 422
		40	1 1/2"	100	35	12,5	507 417	507 423
		50	2"	100	53	7,2	507 152	507 146
 2/2-way-valve, normally open by spring action; (NO)	B	15	1/2"	80	4,5	16	507 425	507 431
		20	3/4"	80	9	16	507 426	507 432
		25	1"	80	15	16	507 427	507 433
		32	1 1/4"	80	23	15	507 428	507 434
		40	1 1/2"	100	35	12,5	507 429	507 435
		50	2"	100	53	7,2	507 158	507 164

\*seal system:

- St. st./St. st.: plug stainless steel/seat stainless steel
- PTFE/St.st.: (soft sealing) plug PTFE/seat stainless steel

**i Weitere Ausführungen auf Anfrage****Materials**






Actuator: PPS

**Media temperature**

Valves for medium temperature to +200°C or to -40°C

## Ordering chart for Angle seat valve (without positioner), continued

## Valves with threaded port connection, flow below seat

	Control function	Port size		Dimensions Ø Pipe x wall thickness [mm]	Actuator size Ø [mm]	Kvs values [m³/h]	Operating pressure ≤ +180°C [bar]	Item no. seal system* St.st./St.st.	Item no. seal system* PTFE/St.st.
		[mm]	[Zoll]						
<b>Acc. EN ISO 1127/ISO 4200, flow below seat</b>									
 2/2-way-valve, normally closed by spring action (NC)	15	1/2"	21.3 x 1.6	80	4,5	16	165 524	165 487	
	20	3/4"	26.9 x 1.6	80	9	16	165 529	165 511	
	25	1"	33.7 x 2.0	80	15	16	165 534	165 514	
	32	1 1/4"	42.4 x 2.0	80	23	15	165 538	165 516	
	40	1 1/2"	48.3 x 2.0	100	35	12,5	165 541	165 519	
	50	2"	60.3 x 2.0	100	53	7,2	165 544	165 521	
 2/2-way-valve, normally open by spring action; (NO)	15	1/2"	21.3 x 1.6	80	4,5	16	165 582	165 547	
	20	3/4"	26.9 x 1.6	80	9	16	165 585	165 551	
	25	1"	33.7 x 2.0	80	15	16	165 567	165 554	
	32	1 1/4"	42.4 x 2.0	80	23	15	165 570	165 559	
	40	1 1/2"	48.3 x 2.0	100	35	12,5	165 596	165 573	
	50	2"	60.3 x 2.0	100	53	7,2	165 599	165 578	
<b>Acc. DIN 11850 series 2, flow below seat</b>									
 2/2-way-valve, normally closed by spring action (NC)	15	1/2"	19.0 x 1.5	80	4,5	16	165 525	165 488	
	20	3/4"	23.0 x 1.5	80	9	16	165 530	165 512	
	25	1"	29.0 x 1.5	80	15	16	165 536	165 030	
	32	1 1/4"	35.0 x 1.5	80	23	15	165 539	165 517	
	40	1 1/2"	41.0 x 1.5	100	35	12,5	165 542	164 778	
	50	2"	53.0 x 1.5	100	53	7,2	165 545	165 522	
 2/2-way-valve, normally open by spring action; (NO)	15	1/2"	19.0 x 1.5	80	4,5	16	165 583	165 548	
	20	3/4"	23.0 x 1.5	80	9	16	165 586	165 552	
	25	1"	29.0 x 1.5	80	15	16	165 568	165 556	
	32	1 1/4"	35.0 x 1.5	80	23	15	165 591	165 571	
	40	1 1/2"	41.0 x 1.5	100	35	12,5	165 597	165 574	
	50	2"	53.0 x 1.5	100	53	7,2	165 600	165 579	

\*seal system:

- St. st./St. st.: plug stainless steel/seat stainless steel
- PTFE/St.st.: (soft sealing) plug PTFE/seat stainless steel

**i Weitere Ausführungen auf Anfrage****Materials**

Actuator: PPS


**Port connections**

SMS 3008, BS 4825 part 1, ASME BPE


**Media temperature**

Valves for medium temperature to +200°C or to -40°C

Materials

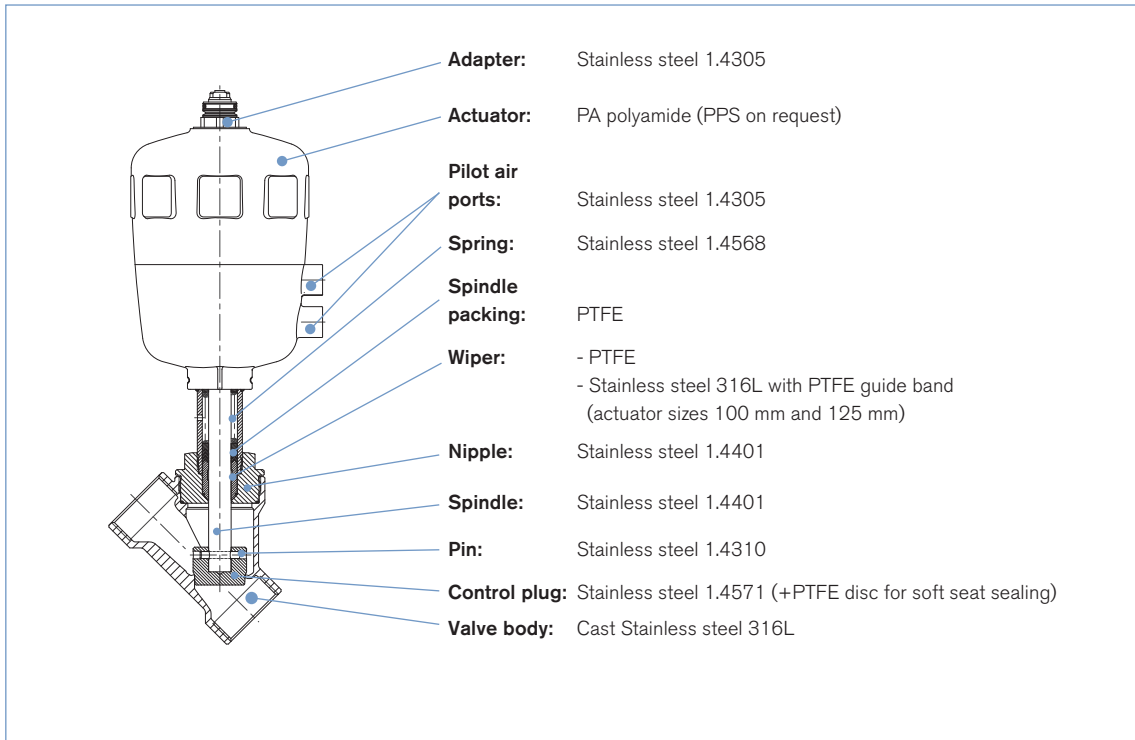


Spare parts for Type 2702 – DN 15-50 (on request)

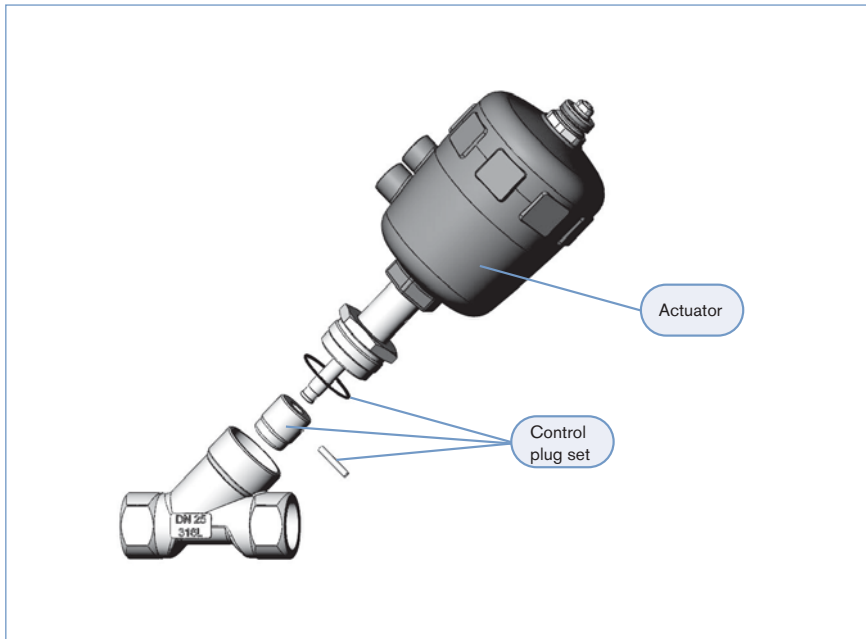

Dimensions Angle seat valve [mm]

Angle seat valve with threaded and weld end connection

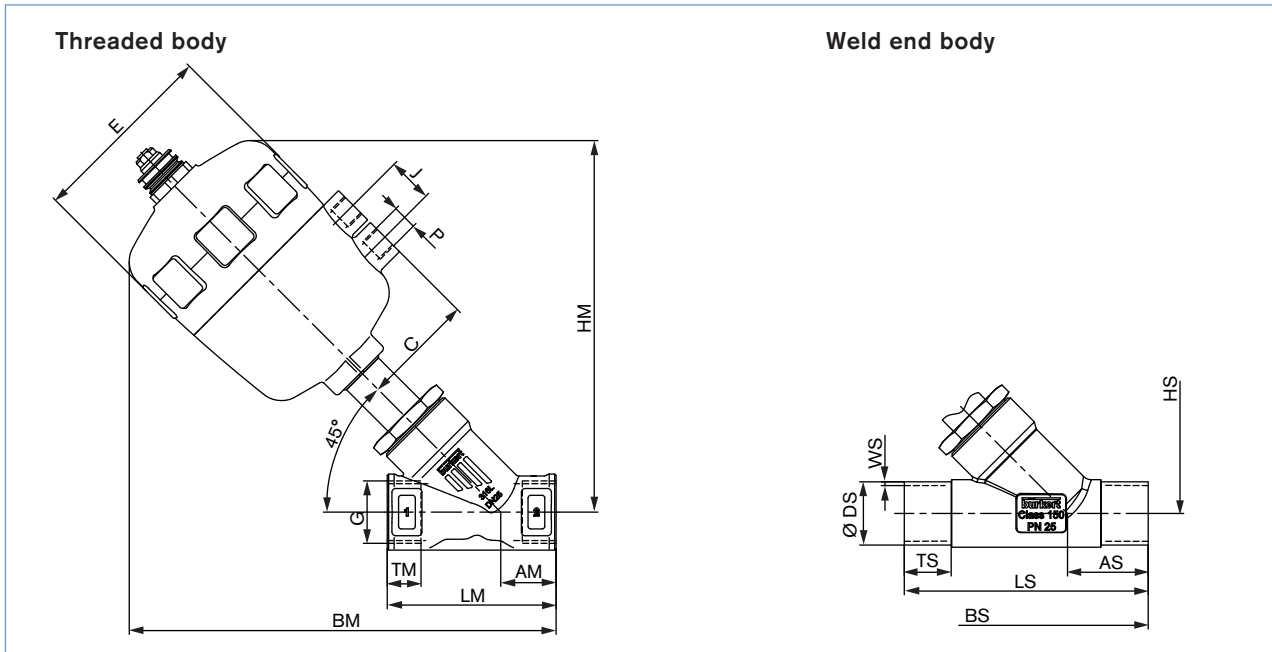

All actuators

Port size [mm]	Actuator size Ø [mm]	ØE	C	P	J
15	80	101	60	G 1/4	24
20	80	101	60	G 1/4	24
25	80	101	60	G 1/4	24
32	80	101	60	G 1/4	24
40	100	127	73	G 1/4	30
50	100	127	73	G 1/4	30

Threaded ports

All threaded bodies		G, NPT and Rc thread				TM		
DN [mm]	HM	BM	LM	AM	G	G thread	NPT thread	RC thread
15	185	209	65	24	G 1/2	14	13,7	13,2
20	193	220	75	27	G 3/4	16	14,0	14,5
25	198	228	90	29,5	G 1	18	16,8	16,8
32	206	242	110	36	G 1 1/4	16	17,3	19,1
40	261	296	120	35	G 1 1/2	18	17,3	19,1
50	275	320	150	45	G 2	24	17,6	23,4

Weld end ports

All welded DN [mm]	EN ISO 1127/ISO 4200 and DIN 11850 Series 2										BS 4825 P1, ASME BPE, SMS 3008										
	HS	EN ISO 1127/ISO 4200			DIN 11850 R2			BS 4825 P1, ASME BPE			SMS 3008										
		BS	LS	AS	ØDS	TS	WS	ØDS	TS	WS	[Zoll]	BS	LS	AS	ØDS	TS	WS <sup>1)</sup>	WS <sup>2)</sup>	ØDS	TS	WS
15	198	232	100	34	21,3	20	1,6	19	20	1,5	1/2"	244	135	46	12,7	38	1,2	1,65	12	38	1
20	198	237	115	39	26,9	25	1,6	23	20	1,5	3/4"	250	145	52	19,05	38	1,2	1,65	18	38	1
25	199	242	130	43	33,7	30	2	29	26	1,5	1"	250	152	51	25,4	38	1,65	1,65	25	38	1,2
32	209	244	145	40	42,4	26	2	35	26	1,5	-	-	-	-	-	-	-	-	-	-	-
40	263	312	160	49	48,3	30	2	41	26	1,5	1 1/2"	323	182	60	38,1	38	1,65	1,65	38	38	1,2
50	277	327	175	50	60,3	30	2,6	53	26	1,5	2"	341	210	64	50,8	45	1,65	1,65	51	45	1,2

<sup>1)</sup> BS 4825 P1 <sup>2)</sup> ASME BPE

## Ordering information for valve system Continuous Classic Type 8802-YC

A valve system Continuous Classic Typ 8802-YC consists of an angle-seat control valve Type 2702 and a digital electropneumatic positioner Type 8692, a digital electropneumatic process controller Type 8693, a digital electropneumatic positioner Basic Type 8694 or an electropneumatic positioner Type 8630 (below), a SideControl Type 8635 or an electropneumatic positioner Type 8792/8793 (next page) (see separate datasheets). For the configuration of further valve systems please use the "Request for quotation" on p. 13 [go to page](#)

You order two components and receive a complete assembled and certified valve.

### Ordering the valve system Continuous Classic Type 8802-YC

#### Angle-seat control valve Type 2702



#### Positioner



Positioner  
Type 8692



Process Controller  
Type 8693



Positioner Basic  
Type 8694

#### Angle-seat control valve with desired control unit



Valve system  
Continuous Classic  
Type 8802-YC-I  
2702 + 8692



Valve system  
Continuous Classic  
Type 8802-YC-J  
2702 + 8693



Valve system  
Continuous Classic  
Type 8802-YC-L  
2702 + 8694

When you click on the orange box "More info." below, you will come to our website for the resp. product where you can download the datasheet.

#### Positioner TopControl Type 8692

More info.



#### Process Controller TopControl Type 8693

More info.




The new generation of integrated positioners/process controllers for combination with actuators from the process valve series Type 23xx/2103 is specially designed for the requirements of hygienic process environments. The easy handling and the selection of additional software functions are done either on a big graphic display with backlight and keypad or via a PC interface. A contact-free analogue position sensor registers the valve position without deterioration. Single-acting or double-acting actuators are controlled via the integral positioner system. With Type 8693, the process controller function is superimposed on the position control loop. Profibus DPV1 and DeviceNet communication interfaces are available as options.

Main customer benefits:

- Compact design of the valve system with integrated positioner/process controller meets the demands for plant washdown environments through the selection of materials, external seals and integrated control air supply to the actuator
- Extremely simple commissioning and operation thanks to the backlighting of the graphics display and proven multilingual software structure
- Automatic parameterisation of the positioner and process controller using the TUNE functions
- Field bus communication via Profibus DPV1 or DeviceNet
- Air intake filter enhances the process valve system availability
- Simple and reliable actuator adaption
- Explosion-proof models for zone 2/22

#### Positioner TopControl Basic Type 8694

More info.



The new generation of integrated positioners for combination with actuators from the process valve series Type 23xx/2103 is specially designed for the requirements of hygienic process environments. The operation and selection of the software functions close tight function, inversion of the operating direction of the setpoint signal, characteristic curves selection and switching manual/automatic operation are effected via push-buttons and DIP switches or via the PC interface. The position setpoint is set using the standard signal 4–20 mA. In addition, the enable can be controlled via the binary input and an optional position feedback can be integrated. The positioner, Type 8694, registers the valve position without deterioration through a contact-free analogue position sensor. Single-acting or double-acting actuators are controlled via the integral positioner system. An AS-Interface communication interface is available as an option.

Main customer benefits:

- Compact design of the valve system with integrated positioner meets the demands for plant washdown environments through the selection of materials, external seals and integrated control air supply to the actuator
- Automatic parameterisation of the process controller using the Process TUNE function
- Field bus communication via optional AS-Interface
- Air intake filter enhances the process valve system availability
- Simple and reliable actuator adaption allowing additional actuators of the process valve series, Type 20xx or actuators from other manufacturers to be used
- Explosion-proof models for zone 2/22

## Ordering information for valve system Continuous Classic Type 8802-YC

A valve system Continuous Classic Type 8802-YC consists of an angle-seat control valve Type 2702 and a digital electropneumatic positioner Type 8692, a digital electropneumatic process controller Type 8693, a digital electropneumatic positioner Basic Type 8694 (previous page) or an electropneumatic positioner Type 8630, a SideControl Type 8635 or an electropneumatic positioner Type 8792/8793 (below) (see separate data-sheets). For the configuration of further valve systems please use the "Request for quotation" on p. 13 [go to page](#)

You order two components and receive a complete assembled and certified valve.

### Ordering the valve system Continuous Classic Type 8802-YC

Angle-seat control valve  
Type 2702

Positioner



Positioner/  
Process Controller  
Type 8630



Positioner/  
Process Controller  
Type 8635



Positioner  
Type 8792/  
Process  
Controller  
Type 8793



Valve system  
Continuous Classic  
Type 8802-YC-A  
2702 + 8630



Valve system  
Continuous Classic  
Type 8802-YC-B  
2702 + 8635



Valve system  
Continuous Classic  
Type 8802-YC-P  
2702 + 8792 /  
Type 8802-YC-Q  
2702 + 8793

When you click on the orange box "More info." below, you will come to our website for the resp. product where you can download the datasheet.

#### TopControl Type 8630

More info.



0/4-20 mA  
0-5/10 V

PROFIBUS  
DeviceNet



The Type 8630 is an electro-pneumatic positioner for usage with pneumatically operated process valves. The compact design with integrated position encoder and LCD display was developed for demanding applications of the process industry.

Main customer benefits are:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard
- Field bus communication via Profibus DPV1 or DeviceNet
- Fits seamlessly to Bürkert's process valve systems
- Break resistant housing
- Explosion proofed versions for zone 2/22

#### SideControl Type 8635, 2-wire, intrinsically safe

More info.



4-20 mA

PROFIBUS



Type 8635 is a digital electropneumatic positioner with an optional, integrated process controller for precise control requirements. The compact design with integrated LCD display was developed for demanding applications of the process industry.

Main customer benefits:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard or Profibus PA
- Remote setpoint adjustment via a 4-20 mA signal
- Adaptation according to IEC534-6 for lift and swivel drives
- Rugged anodised aluminium housing
- Suitable for hazardous locations per zone 1, zone 21 or zone 2 and 22

#### Positioner SideControl Type 8792 Process Controller SideControl Type 8793

More info.

More info.



PROFIBUS



Type 8792/8793 is a digital electro-pneumatic positioner with an optional, integrated process controller (8793) for precise control requirements. Das robuste Design mit integriertem LCD Klartextdisplay wurde für anspruchsvolle Anwendungen der Verfahrenstechnischen Industrie entwickelt. A Profibus DPV1 communication interface is available as an option.


Main customer benefits:

- Time saving algorithms for temperature, flow and pressure PID parameters through ProcessTUNE function.
- Quick and simple menu driven parameterization through keyboard or Profibus DPV1 PA
- Adaption acc. to IEC534-6 and VDI/VDE 3845 for lift and swivel drives or as a Remote version together with Bürkert process valves
- Rugged anodised aluminium housing
- Explosion proofed versions for zone 2/22



Dimensions for valve system Continuous Classic Type 8802-YC [mm]

Dimensions valve system Continuous Type 8802-YC-I with positioner TopControl Type 8692 or 8802-YC-J with process controller TopControl Type 8693 [mm]

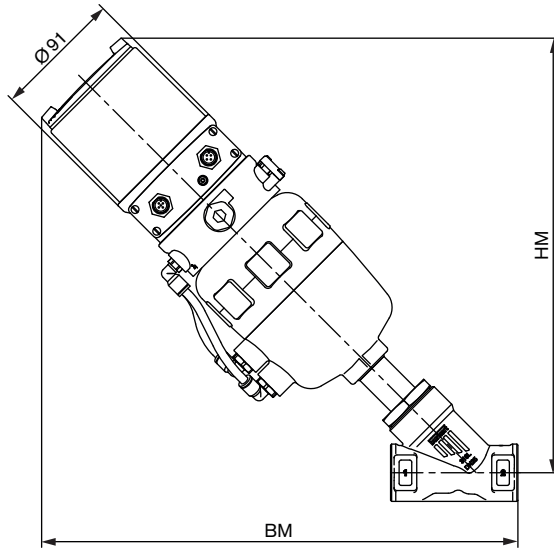

Threaded body

Port size [mm]	Actuator size [mm]	HM [mm]	BM G NPT and Rc thread
15	80	302	326
20	80	302	329
25	80	307	337
32	80	314	349
40	100	363	398
50	100	375	420


Welded body

Port size [mm]	Actuator size [mm]	HM [mm]	BM EN ISO 1127/ISO 4200, DIN 11850 S2	BS 4825, SMS 3008, ASME BPE
15	80	307	341	353
20	80	307	345	358
25	80	308	351	359
32	80	318	358	358
40	100	363	411	422
50	100	380	430	444

Further dimensions see p. 7

Dimensions for valve system Continuous Classic Type 8802-YC [mm], continued


Dimensions valve system Continuous Classic Type 8802-YC-L with positioner TopControl Basic Type 8694 [mm]

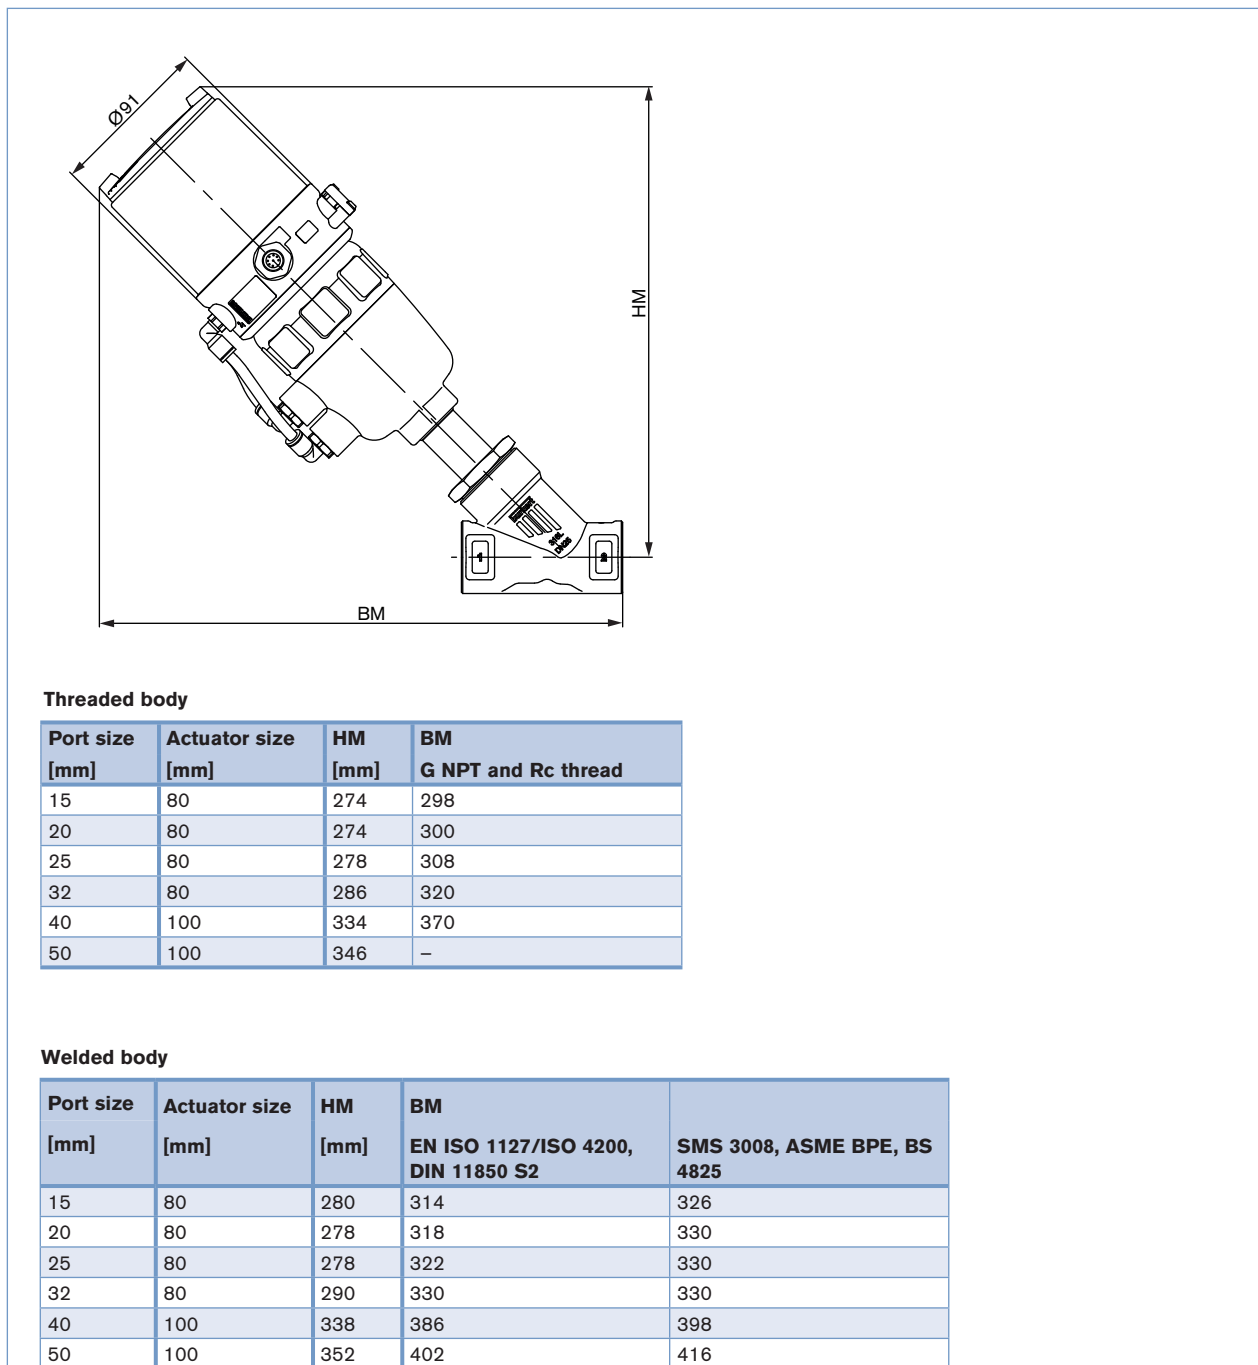

Further dimensions see p. 7


Dimensions for valve system Continuous Classic Type 8802-YC [mm], continued

Dimensions valve system Continuous Classic Type 8802-YC-A with positioner TopControl Type 8630 [mm]

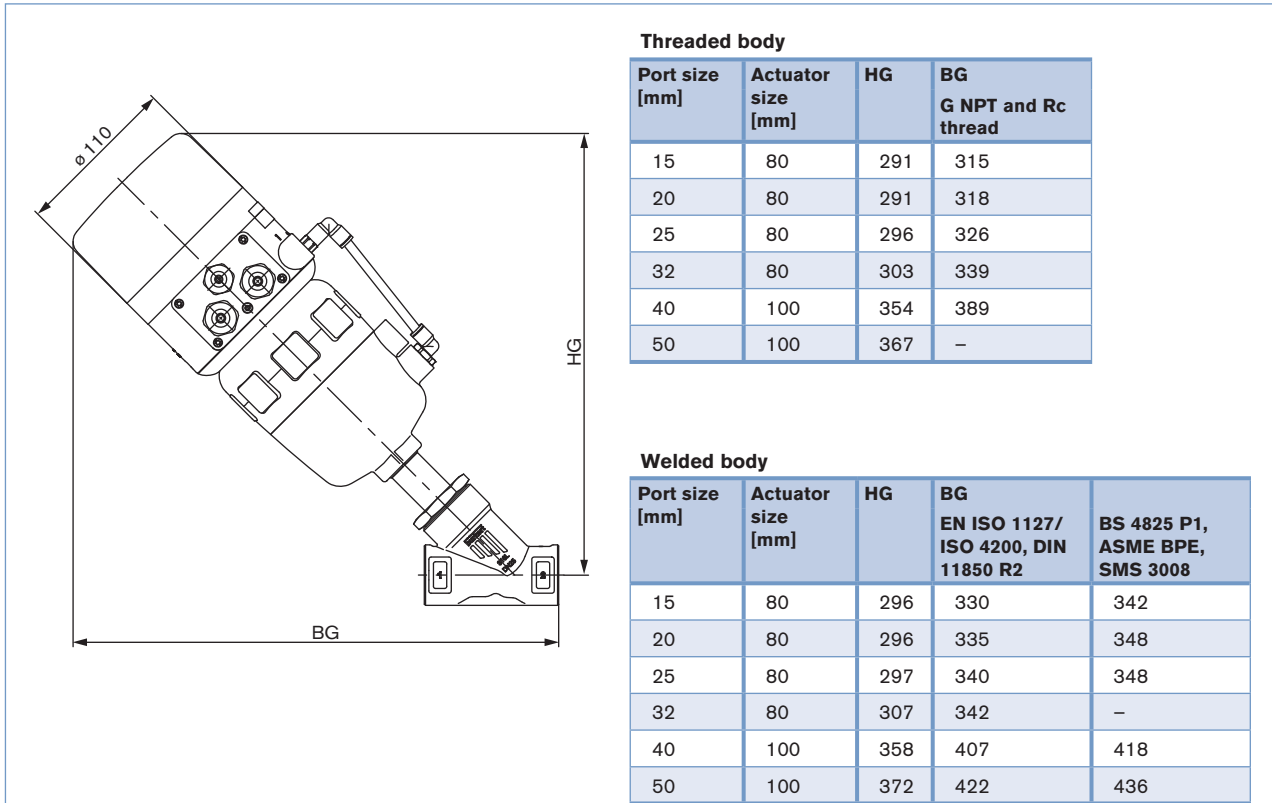

Further dimensions see p. 7


Dimensions valve system Continuous Classic 8802-YC-B with positioner SideControl Type 8635 [mm]

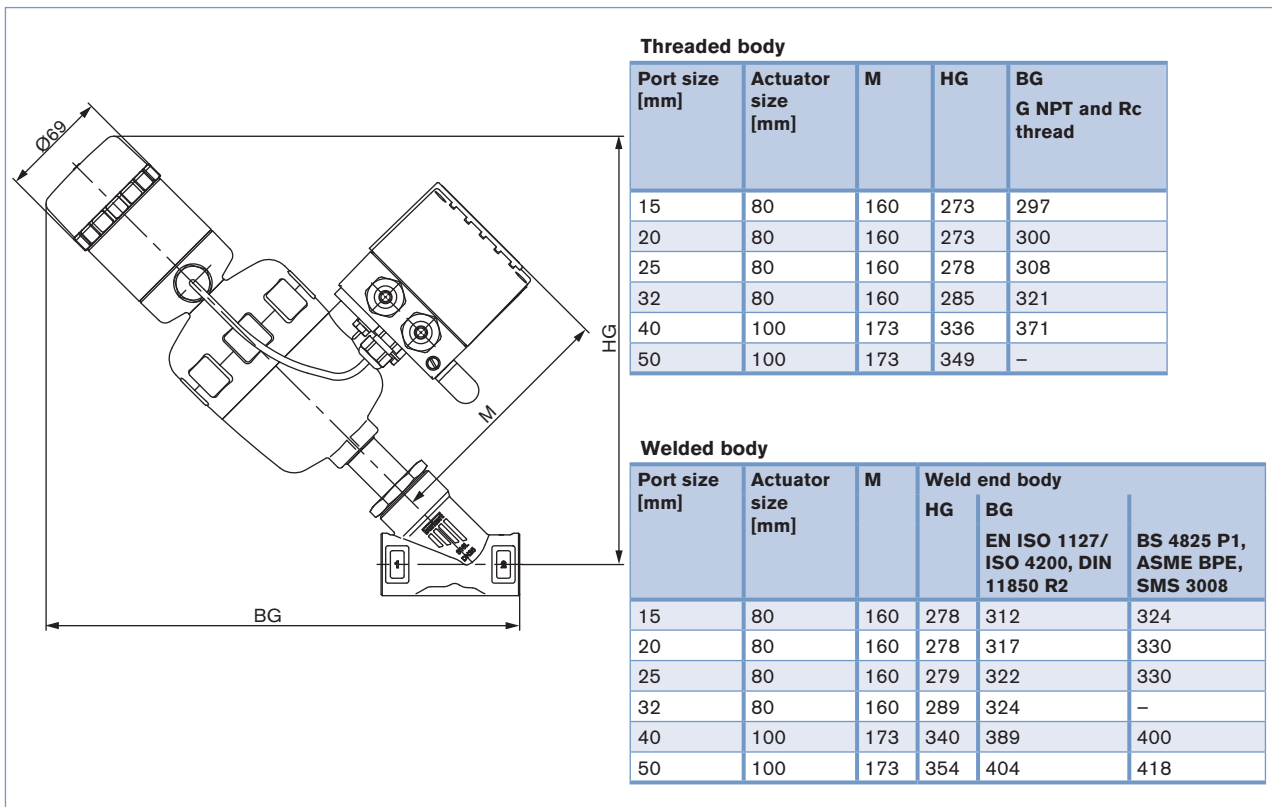

Further dimensions see p. 7

Dimensions for valve system Continuous Classic Type 8802-YC [mm], continued

Dimensions valve system Continuous Classic 8802-YC-P with Positioner SideControl Remote Type 8792 and Type 8802-YC-Q with Process Controller SideControl Remote Type 8793 [mm]

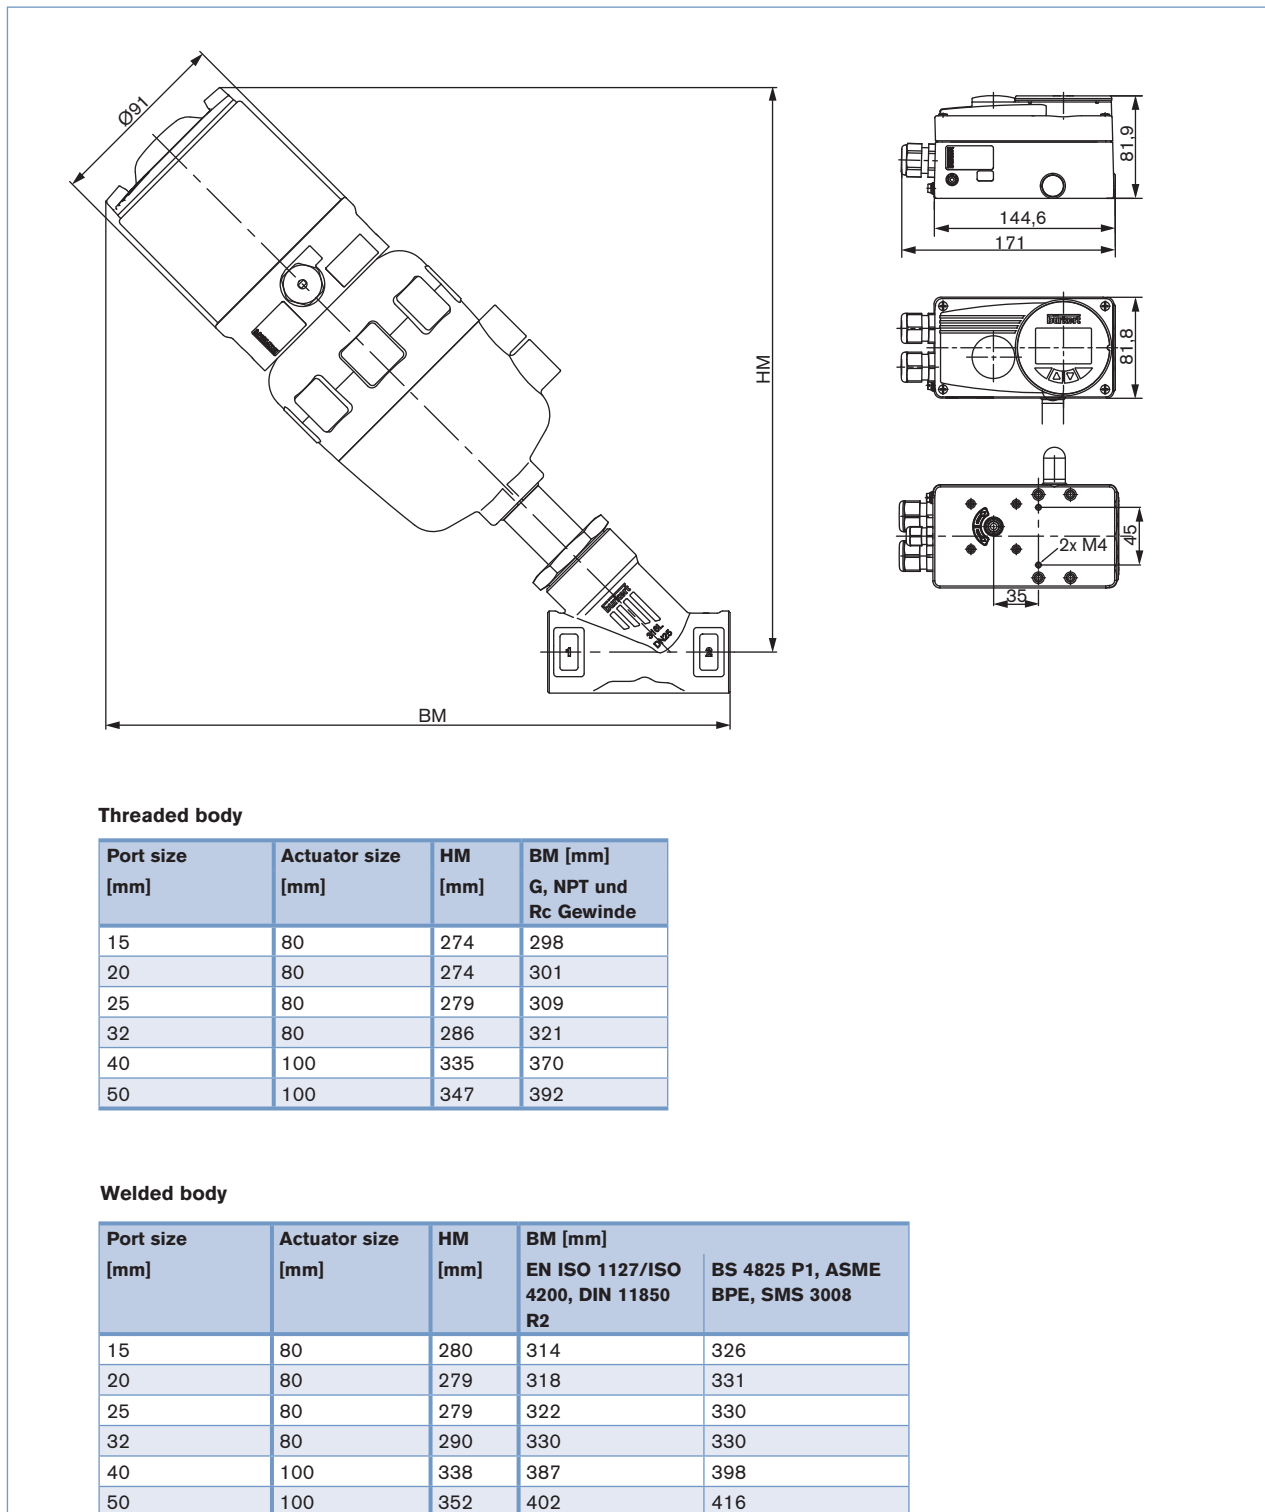

Further dimensions see p. 7

**Note**  
You can fill out the fields directly in the PDF file before printing out the form.

**Valve system Continuous Classic Type 8802-YC-B – Request for quotation**

▶ Please fill out and send to your nearest Bürkert facility\* with your inquiry or order

Company	Contact person
Customer No	Department
Address	Tel./Fax
Postcode/Town	E-mail

= mandatory fields to fill out       Quantity       Required delivery date

**Operating data**

Pipeline	DN	<input type="text"/>	PN	<input type="text"/>
Pipe material	<input type="text"/>			
Process medium	<input type="text"/>			
Type of medium	<input type="checkbox"/> Liquid	<input type="checkbox"/> Steam	<input type="checkbox"/> Gas	
Flow rate (Q, Q <sub>N</sub> , W) <sup>1)</sup>	Min	Standard	Max	Unit
Temperature at valve inlet	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Absolute pressure at valve outlet P2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

<sup>1)</sup> standard unit: Liquid Q = m<sup>3</sup>/h; Steam W = kg/h; Gas Q<sub>N</sub> = Nm<sup>3</sup>/h

**Valve features**

Actuator material	<input type="checkbox"/> PA	<input type="checkbox"/> PPS		
Body material	<input type="checkbox"/> Cast stainless steel			
Seat sealing material	<input type="checkbox"/> St. st./St. st.	<input type="checkbox"/> PTFE/St. st.		
Nominal pressure	PN	<input type="text"/>		
Orifice	DN	<input type="text"/>		
Connection	<input type="checkbox"/> Weld	<input type="checkbox"/> thread		
Connection acc. to Standard	<input type="checkbox"/> ISO	<input type="checkbox"/> DIN	<input type="checkbox"/> ANSI	<input type="checkbox"/> Other <input type="text"/>
Control function	<input type="checkbox"/> NC <sup>2)</sup>	<input type="checkbox"/> NO <sup>2)</sup>		
Pilot pressure	<input type="text"/> min.	<input type="text"/> max.		

Please specify item no. if known:

<sup>2)</sup> NC: normally closed by spring action; NO: normally open by spring action

continued on next page

\* To find your nearest Bürkert facility, click on the orange box



[www.burkert.com](http://www.burkert.com)

Valve system Continuous Classic Type 8802-YC - Request for quotation, Forts.

<b>Control unit features</b>		
<input type="checkbox"/> Positioner TopControl Type 8692 <a href="#">More info.</a>	<input type="checkbox"/> Process Controller TopControl Type 8693 <a href="#">More info.</a>	<input type="checkbox"/> Positioner TopControl Basic Type 8694 <a href="#">More info.</a>
<b>Pneumatic function</b> <input type="checkbox"/> Single-acting <input type="checkbox"/> Double-acting <b>Communication</b> <input type="checkbox"/> Profibus <input type="checkbox"/> DeviceNet <b>Electrical connection</b> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection <b>Feedback</b> <input type="checkbox"/> 4-20 mA <input type="checkbox"/> 4-20 mA + 2 binary outputs <b>Initiator</b> <input type="checkbox"/> Initiator <b>Please specify item no. if known:</b> <input type="text"/>		<b>Pneumatic function</b> <input type="checkbox"/> Single-acting <b>Pilot air ports:</b> <input type="checkbox"/> Push-in connector external ø 6 mm or 1/4" <input type="checkbox"/> Thread G 1/8" <b>Electrical connection</b> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection <b>Feedback</b> <input type="checkbox"/> 4-20 mA <b>Please specify item no. if known:</b> <input type="text"/>
<input type="checkbox"/> Positioner TopControl Type 8630 – 3-wire <a href="#">More info.</a>	<input type="checkbox"/> Positioner SideControl Type 8635 – 2-wire <a href="#">More info.</a>	<input type="checkbox"/> Positioner SideControl Remote Type 8792 <a href="#">More info.</a> <input type="checkbox"/> Process Controller SideControl Remote Type 8793 <a href="#">More info.</a>
<b>Power supply</b> 24 VDC <b>Communication</b> Setpoint / feedback analogue Signal or via BUS <input type="checkbox"/> Profibus DP <input type="checkbox"/> DeviceNet <input type="checkbox"/> Positioner version Input 0/4 - 20 mA / 0-5/10 V Feedback <input type="checkbox"/> 4 - 20 mA <i>or/and</i> <input type="checkbox"/> Binary <input type="checkbox"/> PID Controller version <sup>3)</sup> Input measuring signal 4 - 20 mA / Pt100 / Frequency <b>Inductive proximity switch</b> <input type="checkbox"/> 1 <input type="checkbox"/> 2 <b>Please specify item no. if known:</b> <input type="text"/>	<input type="checkbox"/> Standard <input type="checkbox"/> ATEX/FM Zone 1 <input type="checkbox"/> Zone 2/22 <b>Power supply</b> 24 VDC via Setpoint or BUS <b>Communication</b> Setpoint / feedback analogue signal or via BUS <input type="checkbox"/> Profibus PA <input type="checkbox"/> Positioner version Input 4-20 mA Feedback <input type="checkbox"/> 4-20 mA <i>or/and</i> <input type="checkbox"/> Binary <input type="checkbox"/> PID Controller version <sup>3)</sup> Input measuring signal 4-20 mA <b>Inductive proximity switch</b> <input type="checkbox"/> 1 <input type="checkbox"/> 2 <b>Please specify item no. if known:</b> <input type="text"/>	<b>Power supply</b> 24 VDC <b>Communication</b> <input type="checkbox"/> without <input type="checkbox"/> Profibus DPV1 <b>Feedback</b> <input type="checkbox"/> Analogue feedback + 2 binary outputs <input type="checkbox"/> 2 binary outputs <b>Electrical connection</b> <input type="checkbox"/> Cable gland <input type="checkbox"/> Multipol connection <b>Please specify item no. if known:</b> <input type="text"/>

<sup>4)</sup> same setpoint for input and feedback signal as for Positioner version

Comments